

NIBE SAM 42 Äänentehotaso

A-painotettu
äänentehotaso
standardin EN 12102
mukaan

dB(A) re. 1pW

		<i>Min¹</i>	<i>Nimelli- nen²</i>	<i>Maks³</i>
Tuote	$L_{W(A)}$	34,0	41,0	41,0
Tuloilmakanava	$L_{W(A)}$	41,0	47,0	50,0
Ulkoilmakanava	$L_{W(A)}$	41,0	46,5	50,0

1 120 m³/h (33 l/s) 120 Pa

2 200 m³/h (56 l/s) 160 Pa

3 280 m³/h (78 l/s) 180 Pa


Äänitehotaso EN
12102

dB re. 1pW

		<i>Min¹</i>	<i>Nimelli- nen²</i>	<i>Maks³</i>
Tuote	L_W	43,0	50,0	50,0
Tuloilmakanava	L_W	56,5	62,0	63,5
Ulkoilmakanava	L_W	56,0	60,5	63,5


SAM 42

Äänentehotaso
(dB(A) re. 1pW)

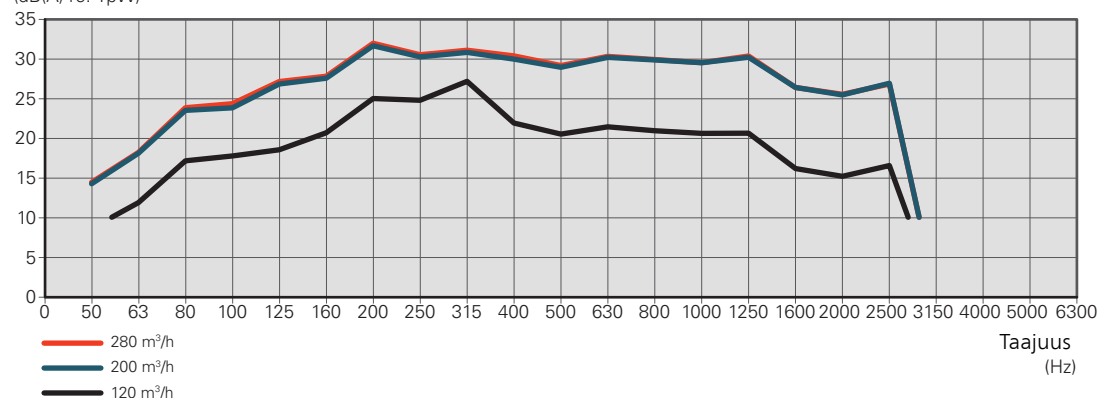

Tuloilmakanava

Äänentehotaso
(dB(A) re. 1pW)

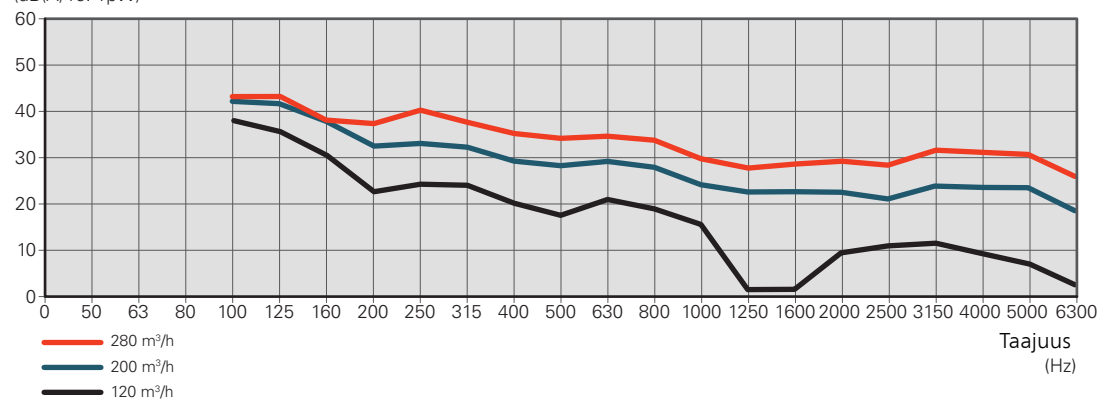

Ulkoilmakanava

Äänentehotaso
(dB(A) re. 1pW)

