

**SERIES**  
**L182**




| D     | a   | b    | c   | f  | g    | l    | s  |
|-------|-----|------|-----|----|------|------|----|
| G 3/8 | 60  | 66   | 77  | 40 | 25,5 | 20   | 22 |
| G 1/2 | 66  | 68   | 82  | 40 | 29   | 20   | 27 |
| G 3/4 | 79  | 72,5 | 89  | 50 | 35,5 | 24,5 | 33 |
| G 1   | 105 | 85   | 106 | 71 | 46   | 28   | 42 |

SERIES  
**L182**

**ASCO™ SOLENOID VALVE**  
2/2 NORMALLY CLOSED – PILOT OPERATED - G 3/8 ÷ G 1

Spare Parts

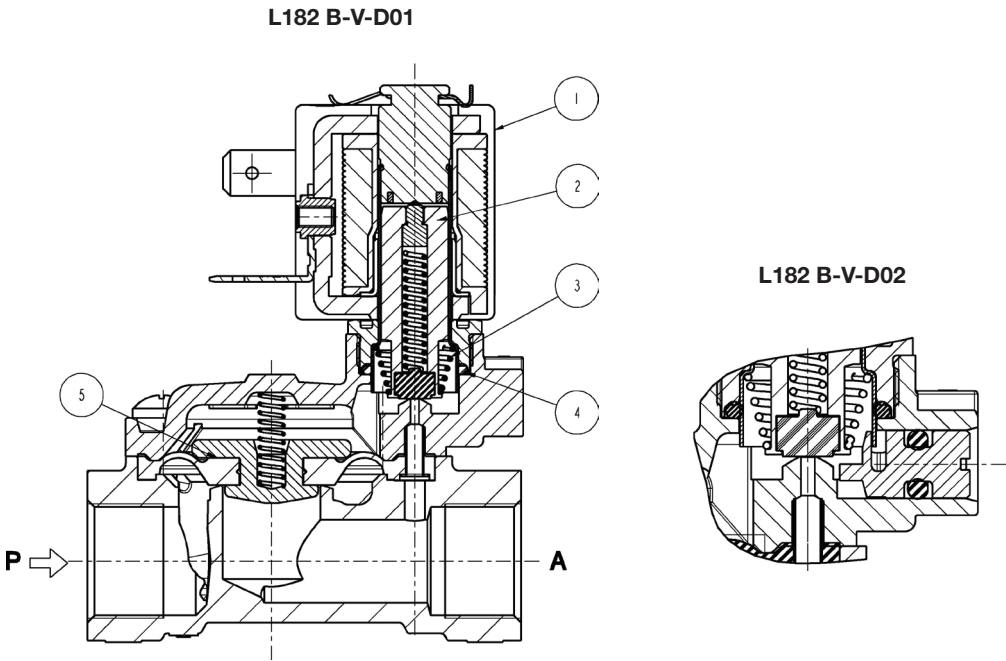

| Kit description    | Model   | Port Size | Kit P.N.             | Consisting of:  |
|--------------------|---------|-----------|----------------------|---|
| Core kit           | L182B-V |           | G3138201             | Core kit pos.2  |
|                    | L182D   |           | G3138202             | Core return spring pos. 3<br>O-Ring guide assembly pos. 4 |
| Diaphragm assembly | L182B   | 3/8-1/2   | 2844302R             | Diaphragm assembly pos.5                                  |
|                    | L182V   | 3/8-1/2   | 2844303R             |   |
|                    | L182D   | 3/8-1/2   | 2844306R             |   |
|                    | L182B   | 3/4       | 2299701R             |   |
|                    |         | 1         | 2380101R             |   |
|                    | L182V   | 3/4       | 2299702R             |   |
|                    |         | 1         | 2380102R             |   |
|                    | L182D   | 3/4       | 2299708R             |   |
|                    |         | 1         | 2380106R             |   |
| Coil               |         |           | ZB10<br>ZB12<br>ZB14 | Coil pos. 1   |

Installation

- Solenoid valve can be mounted in any position; vertical with coil upwards preferred.

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST