



ENERG
енергия · ενέργεια




AMS 10-8 + SPLITBOX



55 °C

35 °C



A++

A++



35 dB



55 dB

■ 10
■ 7
■ 8
kW

■ 9
■ 8
■ 8
kW



2019


811/2013



ENERG
енергия · ενέργεια




AMS10-8 + SPLITBOX + VVM S320

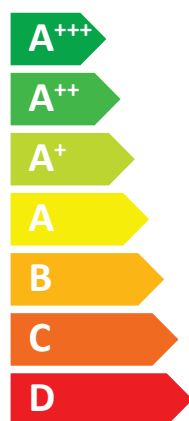

A++



XL

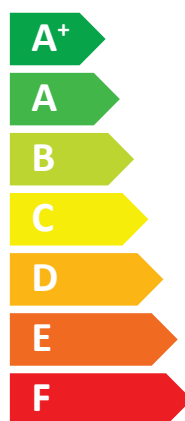

A



35 dB



55 dB




- 10 kW
- 7 kW
- 8 kW



ENERG

енергия · ενεργεια



NIBE

AMS10-8 + SPLITBOX + VVM S320



A⁺⁺



A



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D


E

F

G

A⁺⁺

+



+



+



+



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F


G

A

Supplier's name:	NIBE		
Model:	NIBE AMS10-8+SPLITBOX+VVM S320		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	8,2	7,0	kW
Annual energy consumption for space heating, average climate	3882	4447	kWh
Annual electricity consumption for water heating, average climate	1689		kWh
Seasonal space heating energy efficiency, average climate:	172	127	%
Water heating energy efficiency, average climate:	99		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	9,0	10,0	kW
Rated heat output, warm climate:	8,0	8,0	kW
Annual energy consumption for space heating, cold climate	6264	8844	kWh
Annual electricity consumption for water heating, cold climate	1886		kWh
Annual energy consumption for space heating, warm climate	1879	2333	kWh
Annual electricity consumption for water heating, warm climate	1540		kWh
Seasonal space heating energy efficiency, cold climate:	139	108	%
Water heating energy efficiency, cold climate:	89		%
Seasonal space heating energy efficiency, warm climate:	225	180	%
Water heating energy efficiency, warm climate:	109		%
Sound power level LWA outdoors	55		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	176	131	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	143	112	%
Seasonal space heating energy efficiency of package, warm climate:	229	184	%

Model(s):		NIBE AMS10-8+SPLITBOX+VVM S320							
Type of heat source/sink:		Air-to-water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825 and EN16147									
Rated heat output		Prated	7,0	kW	Seasonal space heating energy efficiency		ηs	127	%
Declared capacity for part load at outdoor temperature Tj				Declared coefficient of performance for part load at outdoor temperature Tj					
Tj = -7 °C	Pdh	6,3	kW	Tj = -7 °C		COPd	1,94	-	
Tj = +2 °C	Pdh	3,9	kW	Tj = +2 °C		COPd	3,11	-	
Tj = +7 °C	Pdh	2,6	kW	Tj = +7 °C		COPd	4,42	-	
Tj = +12 °C	Pdh	3,7	kW	Tj = +12 °C		COPd	5,93	-	
Tj = biv	Pdh	6,6	kW	Tj = biv		COPd	1,83	-	
Tj = TOL	Pdh	5,9	kW	Tj = TOL		COPd	1,86	-	
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)		COPd		-	
Bivalent temperature	Tbiv	-8,6	°C	Operation limit temperature		TOL	-10	°C	
Cycling interval capacity for heating	Pcyh		kW	Cycling interval efficiency		COPcyc		-	
Degradation co-efficient	Cdh	0,97	-	Heating water operating limit		WTOL	58	°C	
Power consumption in modes other than active mode				Supplementary heater					
Off mode	P _{OFF}	0,002	kW	Rated heat output		P _{sup}	1,1	kW	
Thermostat-off mode	P _{TO}	0,01	kW						
Standby mode	P _{SB}	0,015	kW	Type of energy input		Electric			
Crankcase heater mode	P _{CK}	0,03	kW						
Other items									
Capacity control		variable		Rated air flow rate, outdoors			3000	m³/h	
Sound power level, indoors/outdoors		L _{WA}	35/55	dB	Rated water flow rate, indoor heat exchanger		0,60	m³/h	
Annual energy consumption		Q _{HE}	4447	kWh	Rated brine or water flow rate, outdoor heat exchanger			m³/h	
For heat pump combination heater:									
Declared load profile		XL		Water heating energy efficiency		η _{lwh}	99	%	
Daily electricity consumption		Q _{elec}	7,69	kWh	Daily fuel consumption		Q _{fuel}	kWh	
Annual electricity consumption		AEC	1689	kWh	Annual fuel consumption		AFC	GJ	
Approved by:									
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							